


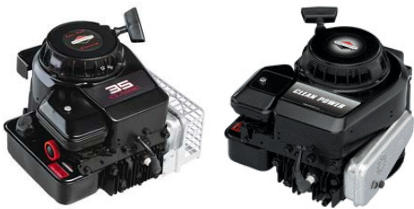

Vertical Shaft Engines

Always monitor oil level when adding.

(See Owner's Manual for proper procedure.)

Model Name & Horsepower	Picture	Approximate Oil Capacity
CLASSIC™ Sprint™ POWER BUILT™ CLEAN POWER™ 3.5-3.75 HP		20 fl oz (.59 l)
Quattro™ SQ  4.0-4.75 HP		20 fl oz. (.59 l)
EUROPA 5 HP		22 fl oz. (.65 l)
GenPower™ CLEAN POWER™ QUANTUM® QUANTUM XTE 5-6 HP		20 fl oz. (.59 l)



Vertical Shaft Engines

Always monitor oil level when adding.

(See Owner's Manual for proper procedure.)

Model Name & Horsepower	Picture	Approximate Oil Capacity
QUANTUM I/C QUANTUM XTE I/C QUANTUM EDGE QUANTUM Diamond Plus 5-6.5 HP		20 fl oz. (.59 l)
CLEAN TEK Pro GenTek I/C GenTek Pro 6-6.75 HP		22 fl oz. (.65 l) *
GenPower™ INTEK INTEK Edge INTEK PRO 6-6.75 HP		22 fl oz. (.65 l) *
GenPower™ CLEAN POWER™ POWER BUILT™ 8-11 HP		36 fl oz. (1.06 l)
INTEK™  POWER BUILT™ OHV 9-13.5 HP		48 fl oz. (1.42 l) *

*If engine is equipped with Oil Filter, add approximately 4 oz. (.12L).

(See Owner's Manual for proper procedure.)



Vertical Shaft Engines

Always monitor oil level when adding.

(See Owner's Manual for proper procedure.)

Model Name & Horsepower	Picture	Approximate Oil Capacity
CLEAN POWER™ POWER BUILT™ I/C I/C QUIET I/C Diamond Plus 12-14 HP		48 fl oz (1.42 l)
VANGUARD™ HIGH PERFORMANCE I/C (Single Cylinder) 15-16 HP		48 fl oz. (1.42 l) *
 Equipped INTEK & ELS™ 13.5-17.5 HP		48 fl oz. (1.42 l) *
CLEAN TEK Pro GenTek™ Pro 15.5-17.5 HP		48 fl oz. (1.42 l) *
I/C Twin I/C Diamond Plus 18-20 HP		48 fl oz. (1.42 l) *

*If engine is equipped with Oil Filter, add approximately 4 oz. (.12L).

(See Owner's Manual for proper procedure.)



Vertical Shaft Engines

Always monitor oil level when adding.

(See Owner's Manual for proper procedure.)

Model Name & Horsepower	Picture	Approximate Oil Capacity
VANGUARD™ VTwin GenTek™ Pro PowerBuilt™ TWIN 16-23 HP		48 fl oz. (1.42 l) *
GenTek™ Pro INTEK VTwin & ELS™ 22-26 HP		60 fl oz. (1.77 l) *

*If engine is equipped with Oil Filter, add approximately 4 oz. (.12L).
(See Owner's Manual for proper procedure.)



Horizontal Shaft Engines

Always monitor oil level when adding.

(See Owner's Manual for proper procedure.)

Model Name & Horsepower	Picture	Oil Capacity
VANGUARD™ 2.4 HP		13.5 fl oz (.4 l)
VANGUARD™ 4 HP		20 fl oz. (.59 l)
POWER BUILT™ I/C 3.5 Hp		20 fl oz. (.59 l)
INTEK INTEK PRO INTEK I/C INTEK SNOW™* POWER BUILT™ CLEAN POWER™ CLEAN TEK I/C OHV 5-7 HP		20 fl oz. (.59 l) *Intek Snow holds 16 fl oz. (.47 l)
GenTek™ Pro GenTek™ I/C GenPower™ GenTek™ OHV 5.5-6.5 HP		20 fl oz. (.59 l)



Horizontal Shaft Engines

Always monitor oil level when adding.

(See Owner's Manual for proper procedure.)

Model Name & Horsepower	Picture	Oil Capacity
VANGUARD™ 6 HP		24 fl oz. (.71 l)
INTEK SNOW™ 7.5 HP		20 fl oz. (.59 l)
VANGUARD™ 7.5 HP		30 fl oz (.90 l)
GenPower™ I/C INDUSTRIAL PLUS 8-10 HP		44 fl oz. (1.3 l)
INTEK INTEK PRO INTEK I/C POWER BUILT™ GenPower™ OHV 8-11 HP		28 fl oz. (.77 l)



Horizontal Shaft Engines

Always monitor oil level when adding.

(See Owner's Manual for proper procedure.)

Model Name & Horsepower	Picture	Oil Capacity
CLEAN POWER™ CLEAN TEK Pro CLEAN TEK I/C OHV 8-11 HP		28 fl oz. (.77 l)
GenTek™ GenTek Pro GenTek I/C OHV 8-11 HP		28 fl oz. (.77 l)
VANGUARD™ 9 HP		32 fl oz. (1.2 l)
INTEKSNOW™ 9-11 HP		28 fl oz. (.77 l)
VANGUARD™ 11-13 HP		32 fl oz. (1.5 l)
I/C INDUSTRIAL PLUS 11-12 HP		48 fl oz. (1.42 l)



Horizontal Shaft Engines

Always monitor oil level when adding.

(See Owner's Manual for proper procedure.)

Model Name & Horsepower	Picture	Oil Capacity
VANGUARD™ VTwin 16-23 HP		48 fl oz. (1.42 l)*
I/C I/C Twin 18-19 HP		48 fl oz. (1.42 l)*
••FOURCE™•• .75-1 HP		3.0 fl oz. (80ml)
5hp 4 CYCLE Outboard		24 fl oz. (.71 l)

*If engine is equipped with Oil Filter, add approximately 4 oz. (.12L).
(See Owner's Manual for proper procedure.)